


C-MPOMPO-30M9SMF

30m MPO/APC to MPO/APC Yellow OS2 OFNR (Riser-Rated) 12-Strand SMF Fiber Patch Cable

Features

- MPO Female Connectors
- 9/125 Patch cable
- Riser Rated
- 30m Length
- Yellow Jacket Color
- OS2
- Insertion Loss: $\leq 0.7\text{dB}$
- Return Loss: $\geq 60\text{dB}$

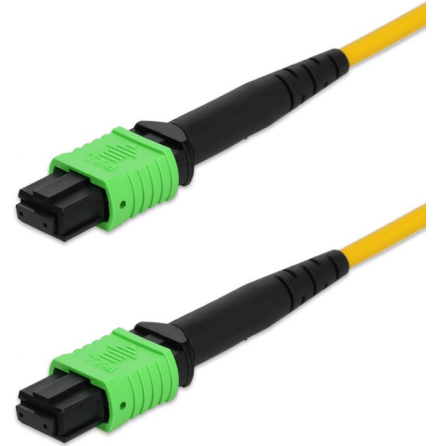


Product Description

This is a 30m MPO/APC to MPO/APC Yellow OS2 OFNR (Riser-Rated) 12-Strand SMF Fiber Patch Cable. OS2 fiber optic cable is a high-performance single-mode fiber designed for long-distance data transmission, making it ideal for businesses requiring reliable and fast network connections over longer distances up to 200 kilometers. With low signal loss and the ability to support 1G to 100G speeds, ensuring efficient communication across offices, data centers, or industrial facilities. OFNR riser fiber cable jackets are designed for vertical installations in building risers, providing fire-resistant protection to ensure safe data transmission between floors. These cables meet strict safety standards, making them ideal for businesses that need reliable, in-building network infrastructure without the risk of fire spreading through conduits. The Standard Boot option provides reliable and straightforward connections for fiber cables, making it an economical choice for various networking applications. Ideal for businesses that require dependable performance without the complexity, this option ensures consistent data transmission in everyday network setups. Our cables are TIA compliant, ensuring performance for all networking needs.

General Specifications

Parameter	Specifications
Environment	Indoor
Fiber Type	SMF
Connector	MPO (Female) to MPO (Female)
Color	Yellow
Shielded	No
Strand Count	12
Cable Mode	Multiple
Jacket Type	Riser
Termination Type	Crossover
Core/Cladding	9/125 μ m
Fiber Termination	APC - Angled Physical Contact
Polarity	Method B
Cable Type	OS2
Armored	No
Bend Insensitivity	G.657.A1
Connector 1 Ferrule Polish	APC (Angled Physical Contact)
Connector 2 Ferrule Polish	APC (Angled Physical Contact)
Insertion Loss Grade	Grade C
Fire Rating	Riser (OFNR)
Jacket Material	PVC (Polyvinyl Chloride)
Outer Diameter	3.0mm
Connector 1 Boot Style	Standard Boot
Connector 2 Boot Style	Standard Boot
Connector 1 Color	Green
Connector 2 Color	Green
Insertion Loss	MPO \leq 0.70dB
Return Loss	MPO \geq 60dB
Cable Tolerance	
Cable Length < 1m	5cm
1m \leq Cable Length < 15m	10cm
15m \leq Cable Length < 30m	15cm
Cable Length \geq 30m	Cable Length* 1%

Mechanical Specifications

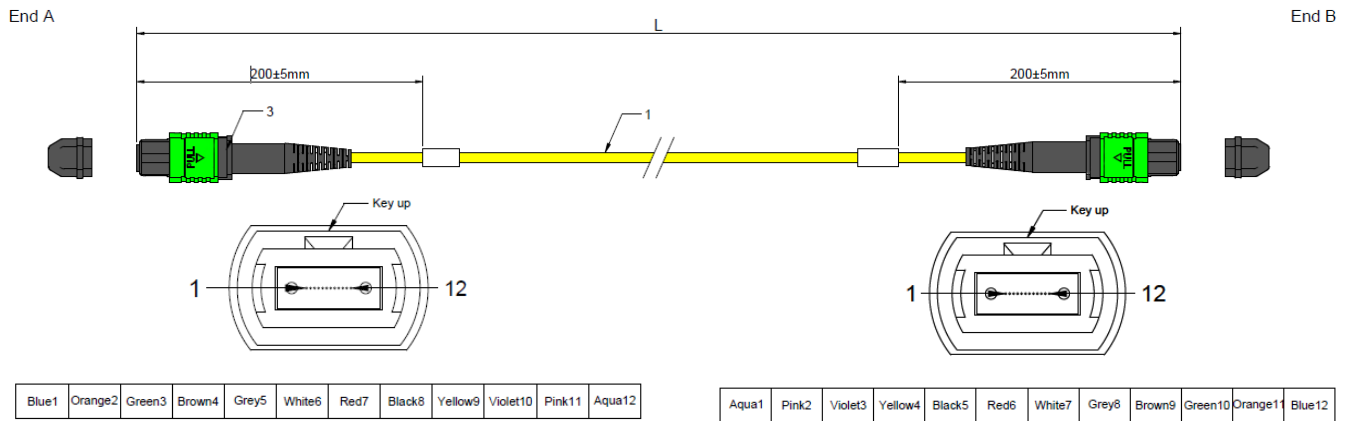

Item	Quantity	Specifications
1	A/R	Ø3.0mm, Single-Mode 9/125 G657A1, 12 Fibers Single Jacket Micro Cable, PVC/LSZH/OFNR, Color: Yellow
2	2	MPO/APC Female, 3.0mm, SM 12F Connector, Green Housing, Black Boot

About ProLabs

Our extensive experience comes as standard. For over 20 years ProLabs has delivered optical connectivity solutions that give our customers freedom and choice through our ability to provide seamless interoperability. At the heart of our company is the ability to provide state-of-the-art optical transport and connectivity solutions that are compatible with more than 100 optical switching and transport platforms.

A Complete Portfolio of Network Solutions

ProLabs is focused on innovations in optical transport and connectivity. The combination of our knowledge of optics and networking equipment enables ProLabs to be your single source for optical transport and connectivity solutions from 100Mb to 1.6T while providing innovative solutions that increase network efficiency. We provide the optical connectivity expertise that is compatible with and enhances your switching and transport equipment.

The Trusted Partner

Customer service is our number one value. ProLabs has invested in people, labs and manufacturing capacity to ensure compatible products, and immediate answers to your questions. With Engineering and Manufacturing offices in the U.K. and U.S. augmented by field offices throughout the U.S., U.K. and Asia, ProLabs is able to be our customers best advocate 24 hours a day.



Contact Information

ProLabs US

Email: sales@prolabs.com

Telephone: 952-852-0252

ProLabs UK

Email: salessupport@prolabs.com

Telephone: +44 1285 719 600