



Specifications

| | | | |
|-------------------|--|---------------|--|
| SHADE | 1/32" thick 3form Varia resin. White Opal top and bottom diffuser. | HARDWARE | 10"Dia canopy and dress plate mounts to standard junction box (provided by others) 1/16" stainless steel cables to ceiling Adjustable 24"-96" suspension White power cord to canopy |
| | | | |
| LIGHTING | Solid State LED System 120v-277v input; 24v driver; 0-10v dimming compatible 3000k, 3500k, 4000k options 81 CRI light source 142w Optional Driver Lutron Hi-lume Premier 0.1% EcoSystem constant Voltage LED driver with Soft-on, Fade-to-Black dimming technology | DIMMING | Dimming 0-10v |
| | | | |
| LUMEN MAINTENANCE | Reported TM-21 Lifetimes L90(17k) = 52,600 hours L80(17k) > 102,000 hours L90(17k) > 102,000 hours | MOUNTING | Fully adjustable stainless steel aircraft cable. Contact LightArt for lengths over 20'. |
| | | | |
| | | CERTIFICATION | CSA approved to UL standards Declare label certified Living Building Challenge compliant Damp rated |
| | | | |
| | | WARRANTY | 5 year warranty on all standard components. LED system rated for operation in ambient environments up to 25°C. |
| | | | |
| | | STANDARDS | 6 week lead time 250+ 3form material options (contact LightArt for custom material pricing) TGIC-free powder coat PVC-free power cord |
| | | | |




Circular


Fixture Options

FIVE X COLLECTION


DIMENSIONS

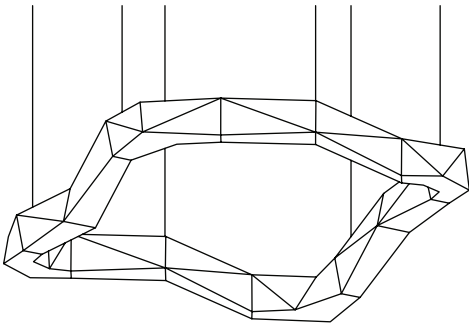

CIRCULAR 01
83"L x 83"W x 24"H

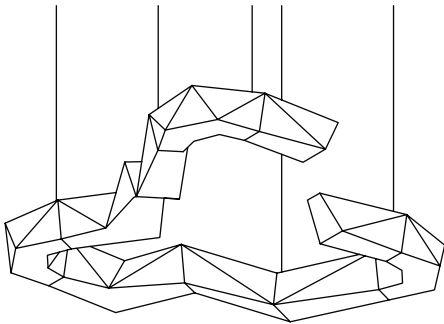

CIRCULAR 02
99"L x 71"W x 16"H

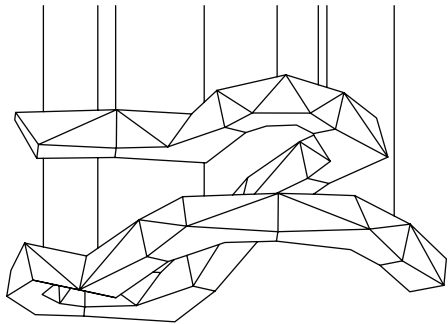


CIRCULAR 03
83"L x 79"W x 24"H


CEILING CONNECTIONS

OFFSET JUNCTION BOX


For recessed canopy, cut 11" dia hole and recess j-box or mounting structure by 1.5"




SURFACE MOUNTED



RECESSED*



4" OCTAGONAL JUNCTION BOX (BY OTHERS)



Required for powered units;
optional for unlit units

CANOPY/DRESS PLATE FINISH OPTIONS



COLOR OPTIONS



align Declare.



MADE IN USA
WITH GLOBAL AND
DOMESTIC PRODUCTS

Circular

Part Number Specification

FIVE X COLLECTION

SPECIFICATION CODE

Example: 2 QTY FIVX-PIV-PC01-GO-830-STD-WP-WH

QTY.

FIVX-PIV-

1

2

3

4

5

6

7

Complete form to order Five X Pivot Circular fixture(s). For each number, make one selection and enter in the corresponding box above.

*Indicates modified choices; additional lead times and/or costs may apply.

1 SIZE

- ☐ PC01 PC01 83"L x 83"W x 24"H
- ☐ PC02 PC02 99"L x 71"W x 16"H
- ☐ PC03 PC03 83"L x 78"W x 24"H
- ☐ CUST* CUSTOM CONFIGURATION*

2 MATERIAL

- ☐ GO GESSO
- ☐ NL NATURAL
- ☐ CR CINDER
- ☐ SO SILKEN OYSTER
- ☐ CB2 CRANBERRY x2
- ☐ VC VITAMIN C
- ☐ WZ WIZARD
- ☐ CUST* ☒ CUSTOM COLOR*

3 LED CRI/CCT

- ☐ 830CK 80 CRI / 3000K
- ☐ 835CK 80 CRI / 3500K
- ☐ 840CK 80 CRI / 4000K

4 SUSPENSION

- ☐ STD 12" - 96"
- ☐ EXT* 24" - 240"*

5 CANOPY OPTIONS

- ☐ STD STANDARD
- ☐ REC* RECESSED*

6 CANOPY COLOR

- ☐ WP WHITE
- ☐ BP BLACK
- ☐ SP MATTE SILVER

7 POWER CORD

- ☐ WH WHITE
- ☐ BK BLACK

align Declare.



MADE IN USA
WITH GLOBAL AND
DOMESTIC PRODUCTS

LightArt

206.524.2223 LIGHTART.COM
4770 OHIO AVE S STE B, SEATTLE, WA 98134

FIVE X PIVOT CIRCULAR
12/08/25 UPDATE 3/3