Somari Table Lamp Overview




Specifications

LIGHTING	Integrated LED light source offering high efficacy. Color consistency of 3 SDCM. See additional information summarizing lumen distribution, wattage, and efficacy on following pages.
LUMEN MAINTENANCE	Reported TM-21 Lifetimes L90(17k) = 52,600 hours L80(17k) > 102,000 hours L70(17k) > 102,000 hours
CONSTRUCTION	PETG PVC free power cord
HARDWARE	Made with RoHS compliant parts.
ELECTRICAL	120V constant current. Total Harmonic Distortion (THD) of < 20%.
CLEANING & CARE	Lightly dust with CO2 canister or swiffer type duster
WARRANTY	5 year warranty on all standard components.


align Declare. Red List Free Ingredients MADE IN USA WITH GLOBAL AND DOMESTIC PRODUCTS POE

Somari Table Lamp Product Details


DIMENSIONS

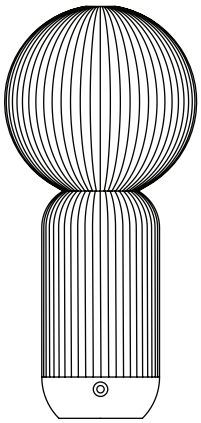

SPHERE
17”H×8”D

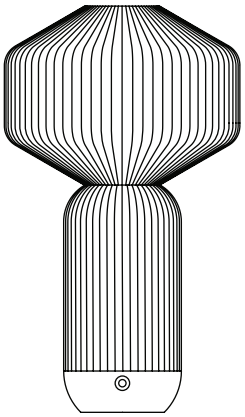


SAUCER
17”H×10”D



BASE
WIDTH

SHADE OPTIONS

TRANSLUCENT COLORS



HALO | SAIL | CLOVER | ROSA | SIENNA | LOOM

OPAQUE COLOR



SHIRO

BASE OPTIONS



OBSIDIAN | MIDNIGHT BLUE | SPRUCE | RUST | CRIMSON | BONE | SHIRO

align Declare. Red List Free Ingredients MADE IN USA WITH GLOBAL AND DOMESTIC PRODUCTS POE

Somari Table Lamp Lighting Details

LIGHT DISTRIBUTION OPTIONS
Consult factory or lightart.com for IES files, tested in accordance with IESNA LM79

OUTPUT MULTIPLIERS
Based on measurement data

COLOR TEMPERATURE / CRI	MULTIPLIER
2700K / 80 2700K / 90	0.93 0.78
3000K / 80 3000K / 90	0.97 0.81
3500K / 80 3500K / 90	1.00 0.83
4000K / 80 4000K / 90	1.01 0.86

MATERIAL	MULTIPLIER
HALO	1.00
SHIRO	0.50
CLOVER	0.65
SAIL	0.80
ROSA	0.90
SIENNA	0.80
LOOM	0.65

OUTPUT MULTIPLIERS INSTRUCTIONS

Adjusted Value = $L_n \times C_m \times S_c$ where:

L_n = (Nominal Lumen output at 3500K / 90 CRI) ×
C_m = (Color Temp. / CRI Multiplier) ×
S_c = (Shade Color Multiplier)

Example:
CYS Nominal / 4000k / 90CRI / Shiro
430LM × 1.03× 0.2 = 89LM approximate fixture output

PERFORMANCE – SOMARI PENDANT
Based on 3500K 90CRI Halo Shade Color

STYLE	INPUT POWER (W)	NOMINAL LUMEN OUTPUT (LM)	EFFICACY (LM/W)
ALL	8.60	475	55.20

**Calculated on theoretical averages derived from 3L and 7C Somari Stacked photometic simulations*

align Declare. Red List Free Ingredients MADE IN USA WITH GLOBAL AND DOMESTIC PRODUCTS POE

Somari Table Lamp Part Number Specification

SPECIFICATION CODE *Example: 2 QTY COL-SOM-TABLE-SAM-CV-SPR-927CK-WH*

QTY. COL-SOM-TABLE - ❶ - ❷ - ❸ - ❹ - ❺

Complete form to order Somari Table Lamp fixture(s). For each number, make one selection and enter in the corresponding box above.
**Indicates modified choices; additional lead times and/or costs may apply.*

❶ SHAPE

☐ SPM	SPHERE
☐ SAM	SAUCER

❷ SHADE COLOR

☐ HL	HALO
☐ SL	SAIL
☐ CV	CLOVER
☐ RS	ROSA
☐ SI	SIENNA
☐ LM	LOOM
☐ SR	SHIRO

❸ BASE COLOR

☐ OBS	OBSIDIAN
☐ MBL	MIDNIGHT BLUE
☐ SPR	SPRUCE
☐ RUS	RUST
☐ CRI	CRIMSON
☐ BON	BONE
☐ SR2	SHIRO

❹ LED CRI / CCT

☐ 927CK	90 CRI / 2700K
☐ 930CK	90 CRI / 3000K
☐ 935CK	90 CRI / 3500K
☐ 940CK	90 CRI / 4000K

❺ POWER CORD

☐ WH	WHITE
☐ BK	BLACK

align Declare. Red List Free Ingredients MADE IN USA WITH GLOBAL AND DOMESTIC PRODUCTS POE